




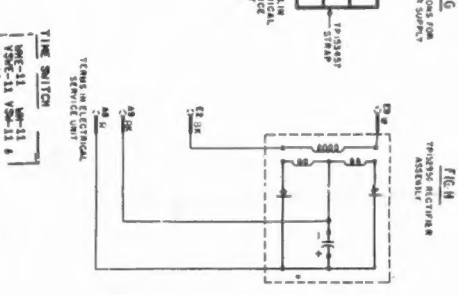
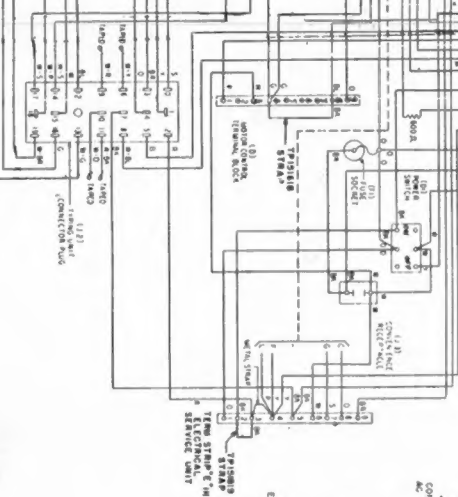
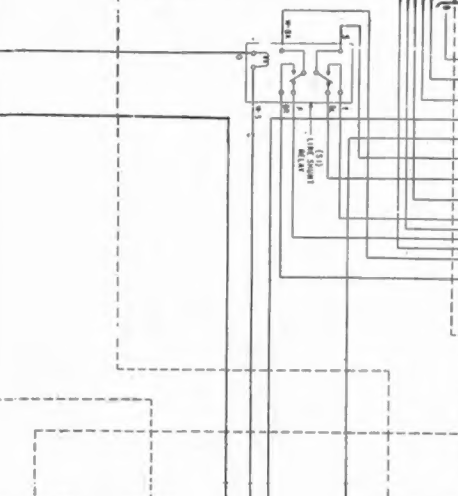
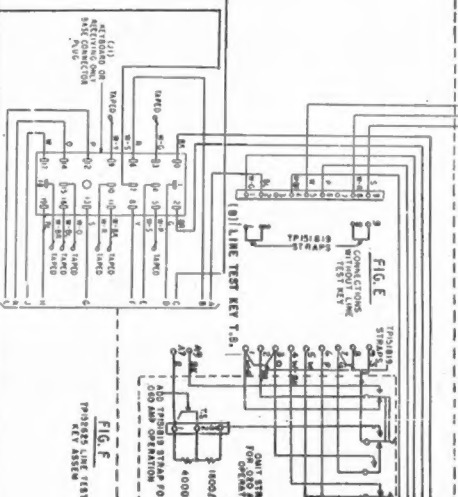
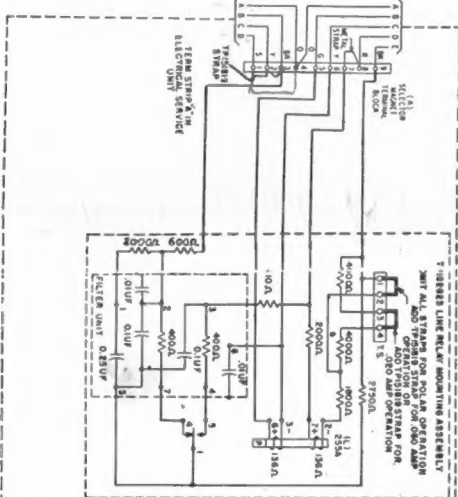



280 TELETYPEWRITER BASE

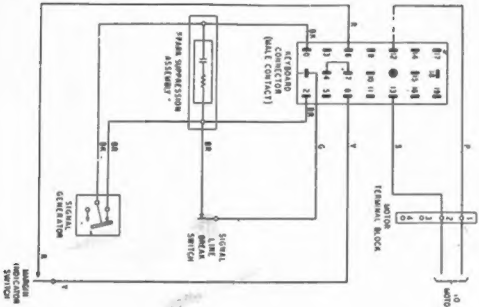

CHANGE FROM PREVIOUS ISSUE  
TO INCLUDE WIRING FOR POSITIVE BATTERY  
AND NEGATIVE BATTERY AT TTY TO LINE.

- NOTES:
1. WIRE MAN SHALL LINE OUT ALL FIGURES NOT USED ON COPY OF WIRING PLAN WHICH ACCOMPANIES STATION.
  2. CANCELLED.
  3. UNLESS OTHERWISE SPECIFIED ALL COLOR CODED INTERCONNECTING LEADS SHALL BE 22GA BRONZ, TYPE GS STATION WIRE PER A.T. & T. CO. SPEC. 7039.
  4. THE A & B LEADS SHALL BE CONNECTED TO TERMINALS ON WAVE SHAPING SET AS SPECIFIED ON THE LT WIRING PLAN (SEE B3P P30.620).
  5. ADD P31819 STRAP ON TERMINALS C-9 AND C-11 FOR RECEIVE ONLY SERVICE AND STRAP KO-K1 ON 288 BASE.
  6. REMOVE STRAPS FROM TERMS 21-40 AND 22-35.
  7. LINE AND GROUND CONNECTIONS SHALL BE MADE PER FIG. 2, 3, OR 4.

WIRING PLAN 28 TYPE TELETYPEWRITER  
STATIONS-PRIVATE LINE SERVICE-SEND AND RECEIVE  
REPL. 156. 1-12-57

REF.	NO.
SHOP	ORDER
NO.	